

QUICK MOUNTTM CONFIGURATION AND INSTALLATION GUIDE





QUICK MOUNTTM MODELS

PART #	DESCRIPTION
ITD1580	20.5" Tuff Coat Black
ITD1580-GLV	20.5" Galvanized
ITD1588	18.5" Tuff Coat Black
ITD1588-GLV	18.5" Galvanized
ITD1584	16.5" Tuff Coat Black
ITD1581	14.5" Tuff Coat Black



Will work with most inboard or outboard tilt cylinders. Relief on ITD1580 and ITD1580-GLV will clear most hydraulic tanks. Mounting Hardware is **NOT** included with this product.

OPTIONAL ACCESSORIES		
ITEM #	PART #	DESCRIPTION
1	ITD6268	Quick™ Mount Hang Tab
2	ITD6340	Quick™ Mount Spacer



Quick™ Mount Stop

ITD Quick[™] Mounts come with a pre-bent stop tab for easy installation of Pro Series[™] Toolboxes. If you choose not to use the stop tab, flatten down with a hammer.




Read all safety warnings & instructions carefully before mounting or operating your mount

WARNING

Ensure you have the correct Quick[™] Mount

Measure the distance between your truck deck and frame to determine what type of deck you have.

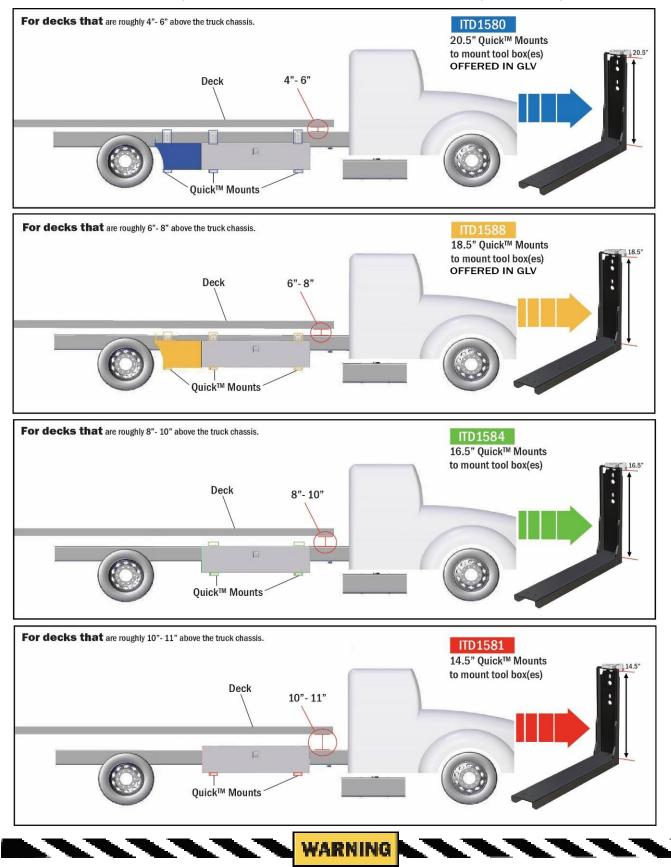

QUICK MOUNT™ SIZE CHART

PART #	DESCRIPTION
ITD1580	20.5" Quick Mount™
ITD1580-GLV	20.5" Galvanized Quick Mount™
ITD1581	14.5" Quick Mount™
ITD1584	16.5" Quick Mount™
ITD1588	18.5" Quick Mount™
ITD1588-GLV	18.5" Galvanized Quick Mount™

